


# TECH

# The shape and numbers of the KCF and CF Series

COVERFEED.COM

coverfeed®

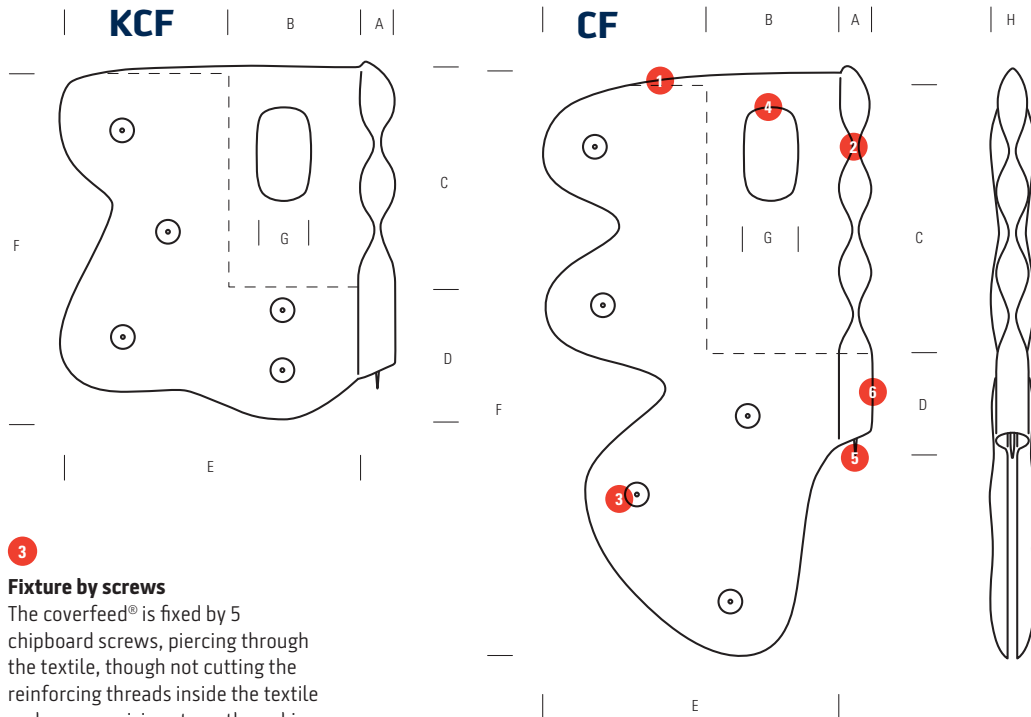

**3 Fixture by screws**  
The coverfeed® is fixed by 5 chipboard screws, piercing through the textile, though not cutting the reinforcing threads inside the textile and compromising strength, making the fixture completely stable. The sockets are countersunk on the screw head side of the Coverfeed® to avoid uneven shapes. See measurement Table for screw lengths and specifications.

**6 Keder collar**  
The keder is protected by a thin collar and fixed by the spike, avoiding exposure of the keder end and fragile leading edge of the textile.

**5 The Spike**  
The pointy spike allows the keder, when inserted, to be kept in precise alignment to the whole fixture.

**1 Protective edge**  
The coverfeed® protects the edge of the textile leading up to the fitting by being covered inside the slit, so battering during installment is kept at a minimum and endurance at max.

**2 The Ripple-slug®**  
The slug going inside the groove is rippled in diameter in order to flex properly, when turning corners in a tent frame's knee.

**4 Reinforced hole for fastening**  
The hole is designed to accommodate the stresses from pulling the tent with rope from one side of the frame to the other. The edge of the hole is bulging in surface, adding material, distributing the loads evenly over the surfaces. This feature make grommets redundant, hence the corner more durable.

## Measurements

## CF Series

## KCF Series

Keder Ø incl. textile, mm	7,5	8,5	9,5	13,0	7,5	8,5	9,5
Coverfeed® model name	CF75	CF85	CF95	CF130	KCF75	KCF85	KCF95
Groove Ø minimum, mm	9	10	11	15	9	10	11
A, mm	8	PENDING	PENDING	PENDING	PENDING	9	PENDING
B, mm	30	30	30	30	30	30	30
C, mm	70	70	70	70	50	50	50
D, mm	20	20	20	20	30	30	30
E, mm	70	70	70	70	70	70	70
F, mm	142	142	142	142	85	85	85
G, mm	14	14	14	14	14	14	14
H, mm	11	11	11	11	11	11	11
Screw, Length mm	10	10	10	10	10	10	10
Screw type	BN1426	BN1426	BN1426	BN1426	BN1426	BN1426	BN1426
Top Cut out, mm	30	30	30	30	30	30	30
Keder side Cut out, mm	70	70	70	70	50	50	50
Keder, cavity drill Ø mm	2-3	2-3	2-3	3-4	2-3	2-3	2-3
Keder cavity drill length	→ 20	→ 20	→ 20	→ 20	→ 20	→ 20	→ 20
Weight, g	49	53	58	82	32	33	35

Note: The screw type is a chipboard type. Coverfeed® suggests a flathead chipboard screw (i.e. Bossard BN1426), though roundheaded can also apply. Socket and screw bit types can be chosen by preference. Make sure that screw tips will NOT go through the other side of the Coverfeed®